# FE110US

## Eco Line Maglock 150 Kgf, unmonitored, surface mount

### Product Overview


Eco Line mini magnetic lock. Surface mounting includes a quick mount bracket

### Application

Internal non high security doors and security cabinets

### Reliable security

This state of the art electro-magnetic locking device provides positive, instantaneous door control. Filler plates, angle brackets, and other mounting adapters are available to satisfy a wide range of door and frame types and conditions.

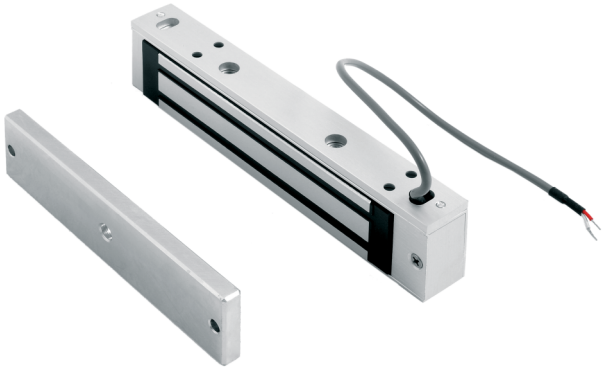

### Details

- 150 Kgf holding force
- Not monitored
- No residual magnetism
- 12/24 V dc jumper selectable operation
- Mounts easily with a minimum of tools

# FE110US

## Eco Line Maglock 150 Kgf, unmonitored, surface mount

## Technical specifications

### General

| | |
|---|---|
| Product type | Magnetic lock |

### Holding force

| | |
|---|---|
| Holding force kgf (Kilogram force) | 150 kgf |
| Holding force N (Newton) | 1500 |

### Monitoring & status

| | |
|---|---|
| Monitored | No |
| LED indicator | No |
| Door status switch | No |
| Monitored changeover | No |
| Magnetic bond sensor | No |

### Electrical

| | |
|---|---|
| Power supply value | 12 / 24 VDC |
| Current consumption | 460 mA (+/- 2,5% @ 13,5 V) |

### Physical

| | |
|---|---|
| Physical dimensions | 166 x 38 x 22 mm (W x H x D) |
| Colour | Aluminium |

As a company of innovation, Kidde Global Solutions reserves the right to change product specifications without notice. For the latest product specifications, visit firesecurityproducts.com online or contact your sales representative.

Last updated on 5 May 2023 - 9:32