STENTO-1023322330

IP-Box-Lautsprecher mit Mikrofon (ZIPS-WC)

Overview

The ZIPS-WC IP speaker integrates with TruVision Navigator 9.2 (and newer) over the ONVIF protocol. This integration creates added value for video surveillance projects for perimeters, logistics centers, parking lots, retail stores, etc.
IP speakers can be installed along cameras to play event-based messages or sound messages can be triggered by an operator. This can prevent theft/vandalism and can deter criminal behavior, while keeping staff at a safe distance.

The Zenitel IP cabinet speaker is equipped with a Class D amplifier, powered via PoE, optimises performance for both voice and multimedia signals. Capable of delivering up to 103 dB SPL peak (1 kHz at 1m) and 99 dB SPL (1m) for continuous signals, it provides clear and reliable audio.
This wall-mounted speaker is ideal for indoor environments that require robust sound output while maintaining a focus on aesthetics. The high IP-rating also allows for installation outdoors.
Every speaker has a build-in memory that can store audio messages.

TruVision Navigator integration

Our VMS TruVision Navigator (version 9.2 and newer) supports the following features for Zenitel IP speakers:
 - Discover the IP speakers on the network
- An operator can start playback for sound messages
- Grouping of IP speakers is supported via the Logical View feature
- IP Speakers are added in the Event-Actions function, so that the desired audio message can be played for a camera event
- IP speakers can be shown on a map and sound messages can be played from the map
- As of version 9.4, the push-to-talk feature was added for supported IP speakers, enabling simultaneous communication across multiple speakers directly from the application.



Einzelheiten

- IP-Lautsprecher zur Verwendung mit TruVision Navigator (ab Version 9.2)
- Speicher zum Speichern von Audionachrichten
- Kann im Innen- und Außenbereich verwendet werden
- PoE-betrieben
- Integrierter 30-W-Klasse-D-Verstärker
- 99 dB Schalldruckpegel bei 1m

STENTO-1023322330

IP-Box-Lautsprecher mit Mikrofon (ZIPS-WC)

Technische Spezifikationen

Electrical

Power supply type	PoE
Power consumption	Max. 12 W, Leerlauf 2 W
Frequency	90 Hz bis 20 KHz

Physical

Physical dimensions	160 x 255 x 189 mm (H x B x T)
Net weight	2,31 kg
Colour	Pure white (RAL 9010)
Mounting type	Ceiling mount, Wall mount
Mounting position	Ceiling, Wall
Housing material	ABS

Environmental

Operating temperature	-40 bis +70°C
Relative humidity	<95% nicht kondensierend
Environment	Indoor, Outdoor
IP rating	IP66 / 67

Regulatory

Compliancy	CE, FCC

Audio


Interner Lautsprecherverstärker	30 W Klasse D
Max. Schalldruckpegel in 1 Meter	103 dBA
Audio line out/induction loop signal	8 Ohm speaker out (powershare)
Switchable Mic/line in	1 (mic/professional line in level)

Netzwerk

Ethernet-Verbindung	RJ 45
Netzwerkprotokolle	IPv4 (mit DiffServ), SIP, TCP, UDP, HTTPS, TFTP, RTP, DHCP, SNMP, ONVIF, CCoIP®, NTP, Power over Ethernet (IEEE 802.3 a-f), Netzwerkzugriffskontrolle (IEEE 802.1x)
Management und Betrieb	HTTP/HTTPS (Webkonfiguration); DHCP und statische IP
IP-Adressinformationen	Spricht die IP-Adresse nach dem Systemstart

Inputs/Outputs

General inputs/outputs	1
Outputs	12 mA as LED drivers
Change-over relay (NO+NC+COM)	48V nominal, max. 100VDC, 70VAC

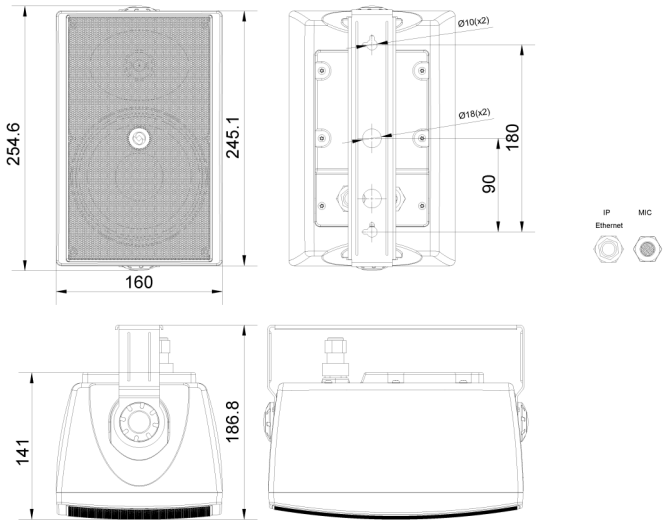

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.