
2010-2-PIB

Addressable Fire Panel Accessory - Peripherals Interface Board

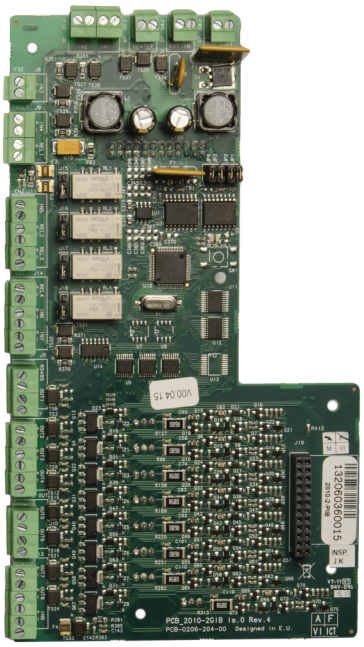

2010-2-PIB

Addressable Fire Panel Accessory - Peripherals Interface Board

Spécifications techniques

General

Maximum system capacity (device count)	1 to 32, more than 160K, up to 120K, up to 128, up to 160K, up to 20K, up to 256, up to 4096, up to 512, up to 60K, up to 64, up to 96
Network size (nodes)	1 to 32, more than 128, up to 128, up to 64

Electrical

Power supply type	VDC

Zone

Maximum zone capacity	1 to 64, more than 1024, up to 1024, up to 256

Physical

Form factor	Large
Mounting type	In cabinet

Regulatory

Compliancy	CE, REACH, RoHS 3, WEEE
Certification	CPR

KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57