
# 2010-2-PIB

**Carta Interface Entradas/Saídas - Série 2x**

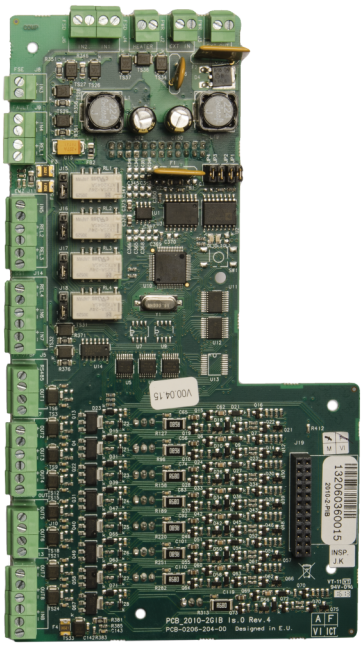

# 2010-2-PIB

## Carta Interface Entradas/Saídas - Série 2x

## Especificações técnicas

### General

| | |
|---|---|
| Maximum system capacity (device count) | 1 to 32, more than 160K, up to 120K, up to 128, up to 160K, up to 20K, up to 256, up to 4096, up to 512, up to 60K, up to 64, up to 96 |
| Network size (nodes) | 1 to 32, more than 128, up to 128, up to 64 |

### Electrical

| | |
|---|---|
| Power supply type | VDC |

### Zone

| | |
|---|---|
| Maximum zone capacity | 1 to 64, more than 1024, up to 1024, up to 256 |

### Physical

| | |
|---|---|
| Form factor | Large |
| Mounting type | In cabinet |

### Regulatory

| | |
|---|---|
| Compliancy | CE, REACH, RoHS 3, WEEE |
| Certification | CPR |

Como empresa de inovação, a Kidde Global Solutions reserva o direito de alterar as especificações do produto sem aviso prévio. Para obter informações sobre as especificações mais recentes do produto, visite pt.firesecurityproducts.com online ou contate o departamento comercial.

Last updated on 12 November 2026 - 18:57