KIDDE™ COMMERCIAL

# 1X-F4

## Conventional Fire Panel - 4 Zone



# 1X-F4

## Conventional Fire Panel - 4 Zone

## Specifiche tecniche

### General

| | |
|---|---|
| Maximum system capacity (device count) | bis zu 1280 |
| Network size (nodes) | bis zu 16 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 4 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 4 |

### Input

| | |
|---|---|
| Input quantity | 2 |

### Physical

| | |
|---|---|
| Form factor | Klein |
| Colour | Grau (RAL 7035) |
| Mounting type | Oberflächenmontage |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-4 |

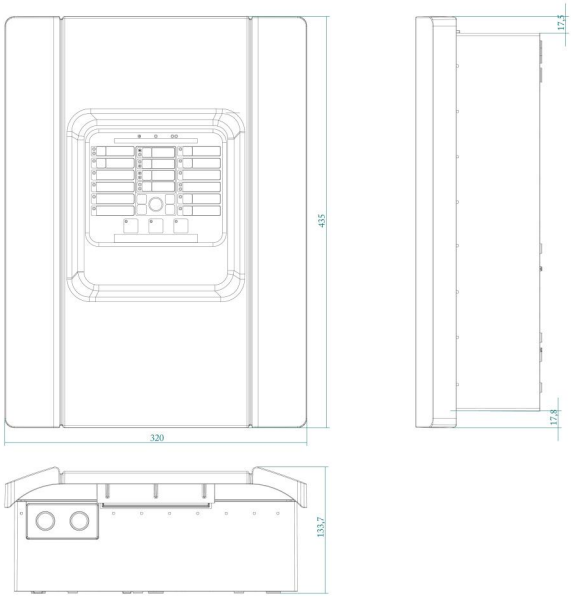


KIDDE COMMERCIAL

In quanto azienda in continua innovazione, Kidde Global Solutions si riserva il diritto di modificare le specifiche del prodotto senza preavviso. Per avere informazioni sempre aggiornate, visita it.firesecurityproducts.com online o contatta il tuo riferimento commerciale.

Last updated on 12 November 2026 - 18:57