# NS2052-8P-2C

**8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports**



# NS2052-8P-2C

## 8-port PoE Unmanaged Industrial Ethernet Switch with 2 x RJ45/SFP Gigabit uplink combo ports

## Technische Spezifikationen

### General

| | |
|---|---|
| Fast ring | Nein |
| DHCP snooping | No |
| Fault relay output | Nein |

### Category

| | |
|---|---|
| Category | Industrial |
| Management | Unverwalteter |
| Managed | Nein |
| PoE | Yes |

### Physical ports

| | |
|---|---|
| No. of ports | 8 |
| Port type | Schnell |
| Speed | Schnell |
| Fiber port | 2 SFP |
| Supported SFPs | Series S30/S35 |

### Switch Performance

| | |
|---|---|
| Mac table | 16 K |
| Jumbo frame support | 10 K |

### Electrical

| | |
|---|---|
| Redundant power | Yes |
| Power supply type | 52 bis 56 VDC |

### Physical

| | |
|---|---|
| Colour | Schwarz |
| Material | Metall |
| Mounting type | DIN-Hutschiene, Wandmontage |
| Stackable | No |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| IEC standard | IEC60068-2-27 (impacto), IEC60068-2-32 (free fall), IEC60068-2-6 (Erschütterung) |

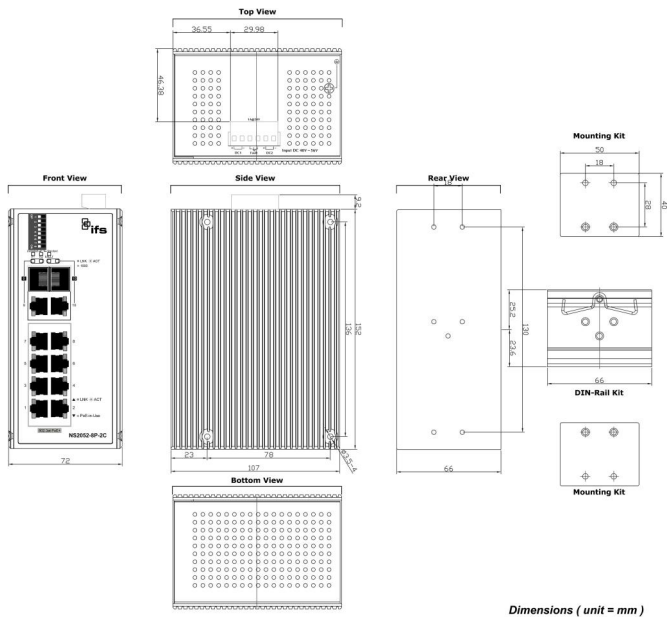


*Dimensions ( unit = mm )*

Als innovatives Unternehmen behält sich Kidde Global Solutions das Recht vor, Produktspezifikationen ohne Ankündigungen zu ändern. Für die aktuellsten Produktspezifikationen, besuchen Sie bitte de.firesecurityproducts.com online oder kontaktieren Sie bitte unsere Vertriebsmitarbeiter.