NS2052-8P-2C

Switch Fast Ethernet no gestionable de 8 puertos PoE de cobre + 2 puertos SFP.



NS2052-8P-2C

Switch Fast Ethernet no gestionable de 8 puertos PoE de cobre + 2 puertos SFP.

Especificaciones técnicas

General

Fast ring	Nein
DHCP snooping	No
Fault relay output	Nein

Category

Category	Industriel
Management	Unverwalteter
Managed	Nein
PoE	Yes

Physical ports

No. of ports	8
Port type	Schnell
Speed	Schnell
PoE/PoE+	8 Puertos PoE+
Fiber port	2 SFP
Supported SFPs	Série S30/S35

Switch Performance

Switch fabric	5.6Gbps
Throughput (Mpps)	4.1
Mac table	16 K
Jumbo frame support	10 K

Layer 2 Functions

Management interface	Intalación plug and play. No requiere programación

Electrical

PoE power budget	30 W (por puerto)
Redundant power	Yes
Power supply type	52 bis 56 VDC
Power consumption	244 W (Máx.)

Physical


Physical dimensions	72 x 107 x 161 mm
Net weight	1034 g
Colour	Schwarz
Material	Metall
Mounting type	DIN-Hutschiene, Wandmontage
Stackable	No

Environmental

Operating temperature	-40 to +75
Storage temperature	-40 to +75
Relative humidity	0 a 95% (sin condensación)
Environment	Drinnen
IP rating	IP30

Regulatory

IEC standard	IEC60068-2-27 (choc), IEC60068-2-32 (chute libre), IEC60068-2-6 (vibration)

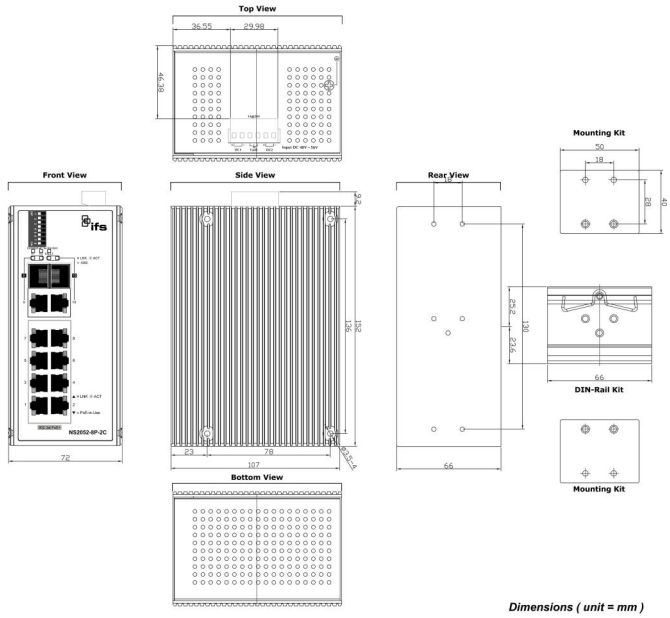

Dimensions (unit = mm)

Como empresa innovadora, Kidde Global Solutions se reserva el derecho de modificar las especificaciones de los productos sin previo aviso. Para conocer las últimas especificaciones de los productos, visite la Web de es.firesecurityproducts.com o póngase en contacto con su comercial.

Last updated on 12 November 2026 - 20:20