DD1012AM

12m Dual Radar/Pir Anti-Masking detector, 78°, 9 gordijnvelden 5,8Ghz. EN Grade 3



DD1012AM

12m Dual Radar/Pir Anti-Masking detector, 78°, 9 gordijnvelden 5,8Ghz. EN Grade 3

Technische specificaties

General

Technology	Dupla
Application type	Montagem em parede
Anti masking	Yes
Pet immune	No
Camera	No
Pry-off tamper kit	Incorporado

Detection

Max. detection range	12 m
Microwave frequency (nom.)	5.8 GHz
Undercrawl protection	Yes
Alarm memory	Yes
Alarm time	3 sec

Wired/wireless

Wired-wireless	Kablede

Inputs/outputs

Relay configuration	Valores EOL múltiplos
Remote control lines	Dia/Noite, Walk test

Physical


Colour	Hvid
Mounting height	1.8 a 3 m

Environmental

Environment	Indendør

Regulatory

EN50131 grade	Lønklasse 3

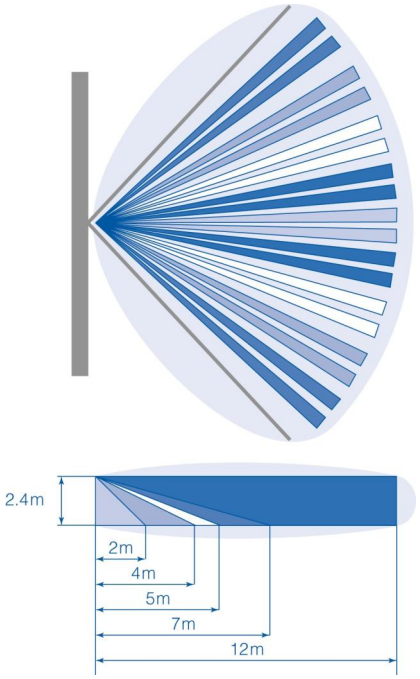

Als een bedrijf van innovatie behoudt Kidde Global Solutions zich het recht voor productspecificaties zonder kennisgeving te wijzigen. Ga voor de nieuwste productspecificaties online naar nl.firesecurityproducts.com of neem contact op met uw verkoopvertegenwoordiger.

Last updated on 12 November 2026 - 18:57