# 1X-F4-SC-28

## Conventional Fire Panel with Scandinavian Key - 4 Zone


Overview

The Panel

Options

Approvals & Compliance




# 1X-F4-SC-28

## Conventional Fire Panel with Scandinavian Key - 4 Zone

## Spécifications techniques

### General

| | |
|---|---|
| Maximum system capacity (device count) | fino a 1280 |
| Network size (nodes) | bis zu 16 |

### Electrical

| | |
|---|---|
| Power supply type | VAC |

### Loop

| | |
|---|---|
| Maximum loop capacity | 4 |

### Zone

| | |
|---|---|
| Maximum zone capacity | bis zu 4 |

### Input

| | |
|---|---|
| Input quantity | 2 |

### Physical

| | |
|---|---|
| Form factor | Klein |
| Colour | Grigio (RAL 7035) |
| Mounting type | Montaggio a superficie |

### Environmental

| | |
|---|---|
| Environment | Drinnen |

### Regulatory

| | |
|---|---|
| Compliancy | CPD, RoHS, WEEE |
| Certification | EN54-13, EN54-2, EN54-4 |

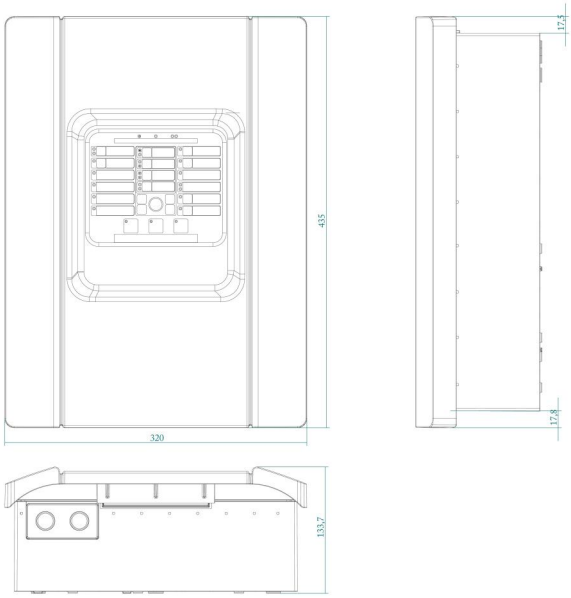


KIDDE COMMERCIAL

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web fr.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57