# DF400

## UltraLink processormodul med 8/8 reläutgångar/ingångar. DIN-skenamontering

Ultralink I/O modules are used to receive and/or transmit alarm information as part of an integrated security system.
Applications include:
-Converting FlexZone sensor alamr collected over the Silver Network to relays or open-collector outputs for input to a 3rd party Secuity Management System.
-Collecting auxiliary sensor alarms with dry-contact inpiuts for display with a Management system.

The Ultralink I/O module connects to the SIlver Network via a communication card. Up to 8 Ultralink expansion modules can be attached to one UltraLink module (DF432). Configuring the mods of operation of the relay ouputs, open-collector outputs and dry-contact inputs is done with the UCM software. The UCM can be connected to the Ultralink modules either by a direct USB connector to the I/O processor or by an IP connection via the Network manager Software.

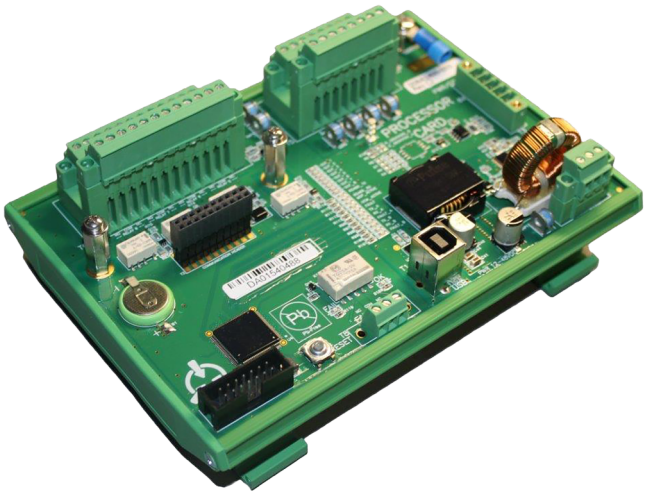

## Detaljer

- Hosts one network communication card
- Expansion port for up to 8 Ultralink expansion modules
- USB configuration port
- 8 relay outputs
- 8 dry-contact inputs
- Supplies power to connected modules
- Modular system comprised of processor module, relay module, open-collector output module & dry-contact input module

# DF400

## UltraLink processormodul med 8/8 reläutgångar/ingångar. DIN-skenamontering

## Tekniska specifikationer

### General

| | |
|---|---|
| Category | FlexZone |
| Product type | FlexZone Besturingseenheid |

### Environmental

| | |
|---|---|
| Environment | Indendør |

Kidde Global Solutions förbehåller sig rätten att ändra produktspecifikationer utan föregående meddelande. För de senaste produktspecifikationerna, besök se.firesecurityproducts.com online eller kontakta din försäljningsrepresentant.

Last updated on 12 November 2026 - 18:57