
ATS1500A-IP-MM-RK

Kit ATS1500A-IP-MM including ATS1115A keypad

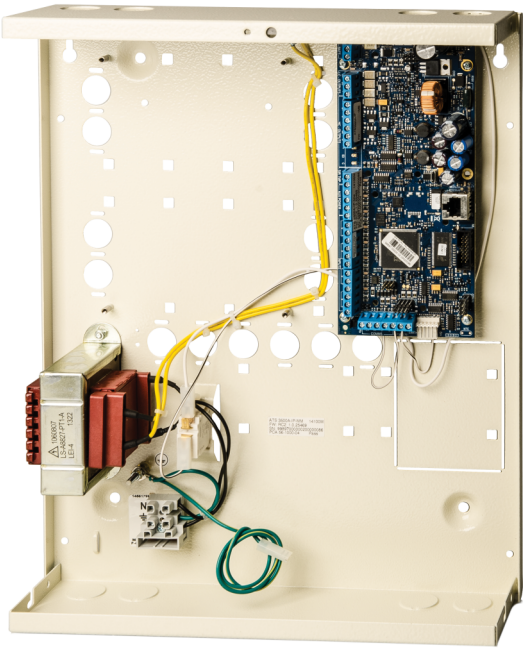

Détails

- 8 entrées zones intégrées
- 32 zones Max. : câblés, sans fil ou mixte
- Extension d'entrée et de sortie économique
- Jusqu'à 16 entrées de capteur
- 4 Groupes
- Jusqu'à 50 utilisateurs
- Port USB pour une configuration locale
- Interface de transmission RTC en option (ATS7700)
- Multilingue : chaque utilisateur a sa propre langue
- Connexion Ethernet 10/100 intégrée
- Rapport d'alarme sur IP vers un récepteur d'alarme OH-NETREC - GPRS en option

ATS1500A-IP-MM-RK

Kit ATS1500A-IP-MM including ATS1115A keypad

Spécifications techniques

System

Product line	Advisor Advanced
Product type	Integrierte Zugangskontrolle
Panel type	Hybrid
Kit	Yes
No. of keypads / readers	8
Data Gathering Panels (DGP)	7
No. of alarm groups	16
Specified cable	WCAT52 / WCAT54

Inputs

Max no. of inputs	32
Onboard inputs	8
Inputs plug-in expansion	8

Outputs

No. of outputs	128
No. of onboard outputs	5

Area

No. of areas	4

User/Cards

Max. no. of users	more than 2000
Max. no. of cards	50
Max. no. of PIN codes	50

Communication

Onboard transmission type	IP
Transmission extension	GSM, GSM/GPRS, GSM/GPRS/IP, PSTN
Databus type	RS485

Electrical

Power supply type	230 VAC
Power supply value	230 VAC +10%, -15%, 50 Hz
Mainboard current consumption	150 mA
Max system current	950 mA at 13.8 V ±0.2 V
Max aux power current	840 mA
Auto-reset fuses	5
Glass break fuses	1

Physical

Physical dimensions	315 × 388 × 85 mm
Material	Stahl (lackiert)
Housing	Średnia metalowa

Environmental

Operating temperature	-10 to +55°C
Relative humidity	0.95
Environmental Class	Class II, indoor
IP rating	30

Regulatory

EN50131 Grade	Klasa 3, z zestawem sabotażu
Compliancy	CE

En tant que société d'innovation, Kidde Global Solutions se réserve le droit de modifier les spécifications des produits sans préavis. Pour les dernières spécifications du produit, visitez le site web be.firesecurityproducts.com ou contactez votre représentant commercial.

Last updated on 12 November 2026 - 18:57